

gia
heat

warming your Life

gia
heat



Gia Heat is an International Manufacturing Company with over 12 years experience in the Heating Industry. We have manufactured worldwide with established loyal architectural partnerships, with many of our products specified in large projects.

Gia Heat has a wealth of knowledge in the Heating Industry and we showcase our success, by offering over 100 individual pieces, designed and manufactured solely by GIA.

The **Gia Heat** collection will cater for all budgets and be split into 3 Collections –

1. Standard Towel Warmers
2. Design Radiators & Towel Rails
3. Unique Design Radiators & Towel Rails.

Should it be required, if you can't find it in our range, we'll make it for you – Simple!!

Gia Heat has studied the market for some time now and we understand the markets needs for competitive pricing and quality workmanship.



So here's what we've created for you:

- Designed & Manufactured Over 100 Products,
- Created 3 Collections and 3 Price Categories
- Maximized Product Outputs
- Use New & Efficient Manufacturing Techniques
- Manufacturer with Recycled Materials
- Created Exclusive New Designs
- Made Unique Finishes, Textures, Gloss/Matt Finishes, Multi-Coloring & **Gia Heat** Exclusives
- Increased Production for Faster Manufacturing Times
- A Experienced Technical Support Team
- Customized Product Solutions

Gia Heat isn't coming to join the Heating Market - We are coming to lead the Market

gia
heat
The future for Heating



aden

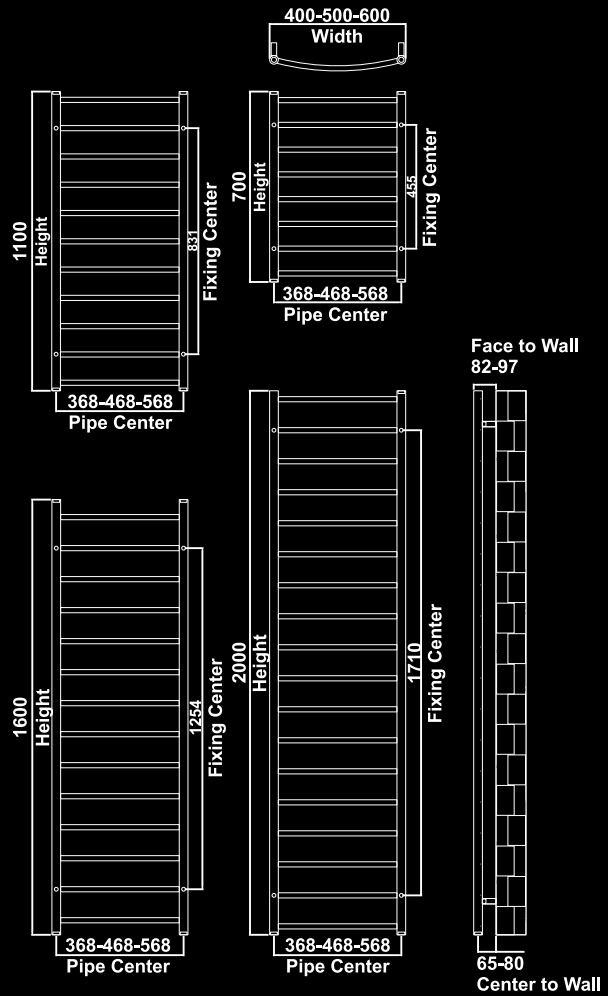

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Aden	Vertical	700	400	72	368	65-80	82-97	455	Ø19x1 - Ø32x1	8-2	E/C/D	948	278
		1100	400	72	368	65-80	82-97	831	Ø19x1 - Ø32x1	11-2	E/C/D	1357	398
		1600	400	72	368	65-80	82-97	1254	Ø19x1 - Ø32x1	14-2	E/C/D	1773	520
		2000	400	72	368	65-80	82-97	1710	Ø19x1 - Ø32x1	18-2	E/C/D	2465	723
		700	500	72	468	65-80	82-97	455	Ø19x1 - Ø32x1	8-2	E/C/D	1033	303
		1100	500	72	468	65-80	82-97	831	Ø19x1 - Ø32x1	11-2	E/C/D	1477	433
		1600	500	72	468	65-80	82-97	1254	Ø19x1 - Ø32x1	14-2	E/C/D	1933	567
		2000	500	72	468	65-80	82-97	1710	Ø19x1 - Ø32x1	18-2	E/C/D	2687	788
		700	600	72	568	65-80	82-97	455	Ø19x1 - Ø32x1	8-2	E/C/D	1139	334
		1100	600	72	568	65-80	82-97	831	Ø19x1 - Ø32x1	11-2	E/C/D	1623	476
		1600	600	72	568	65-80	82-97	1254	Ø19x1 - Ø32x1	14-2	E/C/D	2124	623
		2000	600	72	568	65-80	82-97	1710	Ø19x1 - Ø32x1	18-2	E/C/D	2953	866

E:Electric C:Central D:Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



andes

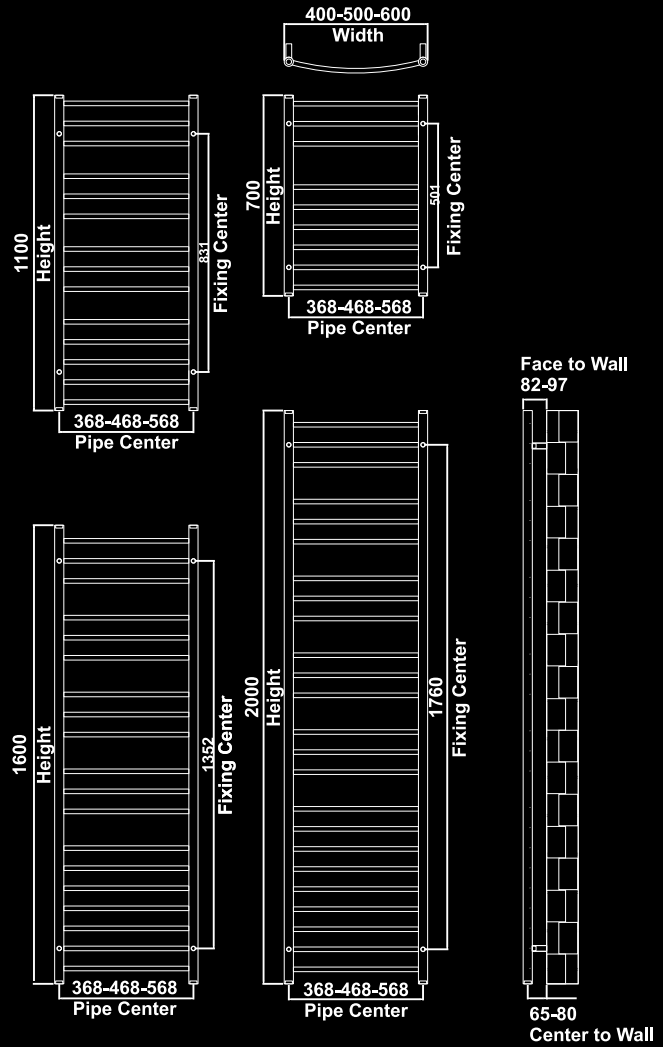

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Andes	Vertical	700	400	72	368	65-80	82-97	501	Ø16x1 - Ø32x1	9-2	E/C/D	900	264
		1100	400	72	368	65-80	82-97	831	Ø16x1 - Ø32x1	14-2	E/C/D	1572	461
		1600	400	72	368	65-80	82-97	1352	Ø16x1 - Ø32x1	19-2	E/C/D	2247	659
		2000	400	72	368	65-80	82-97	1760	Ø16x1 - Ø32x1	24-2	E/C/D	2452	719
		700	500	72	468	65-80	82-97	501	Ø16x1 - Ø32x1	9-2	E/C/D	982	288
		1100	500	72	468	65-80	82-97	831	Ø16x1 - Ø32x1	14-2	E/C/D	1575	462
		1600	500	72	468	65-80	82-97	1352	Ø16x1 - Ø32x1	19-2	E/C/D	2373	696
		2000	500	72	468	65-80	82-97	1760	Ø16x1 - Ø32x1	24-2	E/C/D	2578	756
		700	600	72	568	65-80	82-97	501	Ø16x1 - Ø32x1	9-2	E/C/D	1081	317
		1100	600	72	568	65-80	82-97	831	Ø16x1 - Ø32x1	14-2	E/C/D	1835	538
		1600	600	72	568	65-80	82-97	1352	Ø16x1 - Ø32x1	19-2	E/C/D	2588	759
		2000	600	72	568	65-80	82-97	1760	Ø16x1 - Ø32x1	24-2	E/C/D	2847	835

E:Electric C:Central D:Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)




balbi

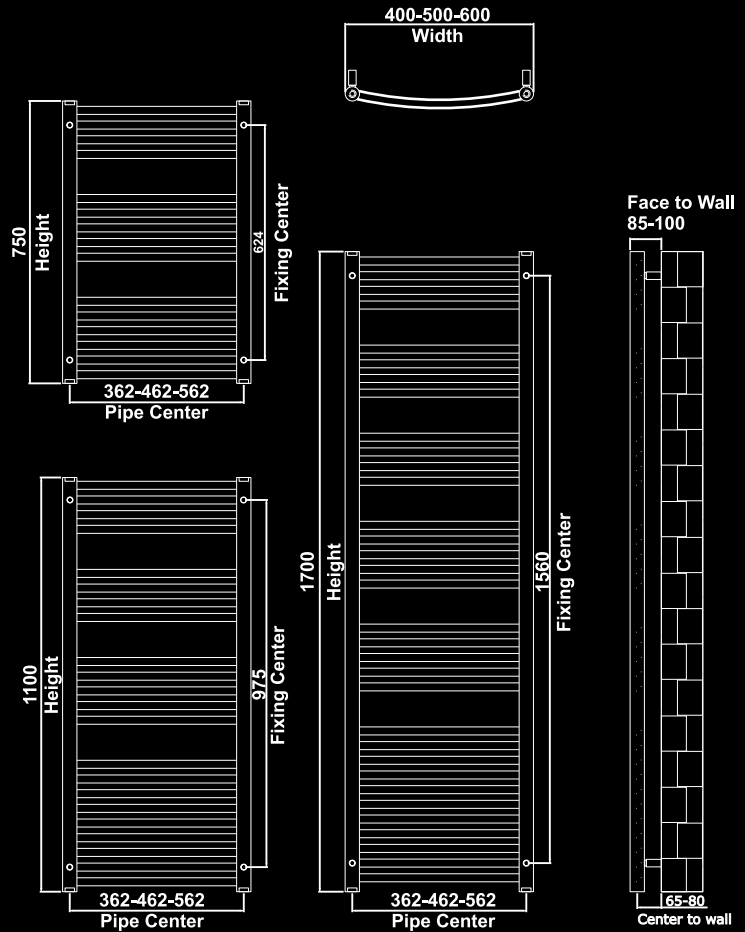

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Balbi	Vertical	750	400	78	362	65-80	85-110	624	Ø21,3x1 - Ø38x1,2	15-2	E/C/D	1292	379
		1100	400	78	362	65-80	85-110	975	Ø21,3x1 - Ø38x1,2	22-2	E/C/D	2302	675
		1700	400	78	362	65-80	85-110	1560	Ø21,3x1 - Ø38x1,2	33-2	E/C/D	2864	840
		750	500	78	462	65-80	85-110	624	Ø21,3x1 - Ø38x1,2	15-2	E/C/D	1432	421
		1100	500	78	462	65-80	85-110	975	Ø21,3x1 - Ø38x1,2	22-2	E/C/D	1331	750
		1700	500	78	462	65-80	85-110	1560	Ø21,3x1 - Ø38x1,2	33-2	E/C/D	3171	933
		750	600	78	562	65-80	85-110	624	Ø21,3x1 - Ø38x1,2	15-2	E/C/D	1575	463
		1100	600	78	562	65-80	85-110	975	Ø21,3x1 - Ø38x1,2	22-2	E/C/D	1464	825
		1700	600	78	562	65-80	85-110	1560	Ø21,3x1 - Ø38x1,2	33-2	E/C/D	3488	1026

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



blancas

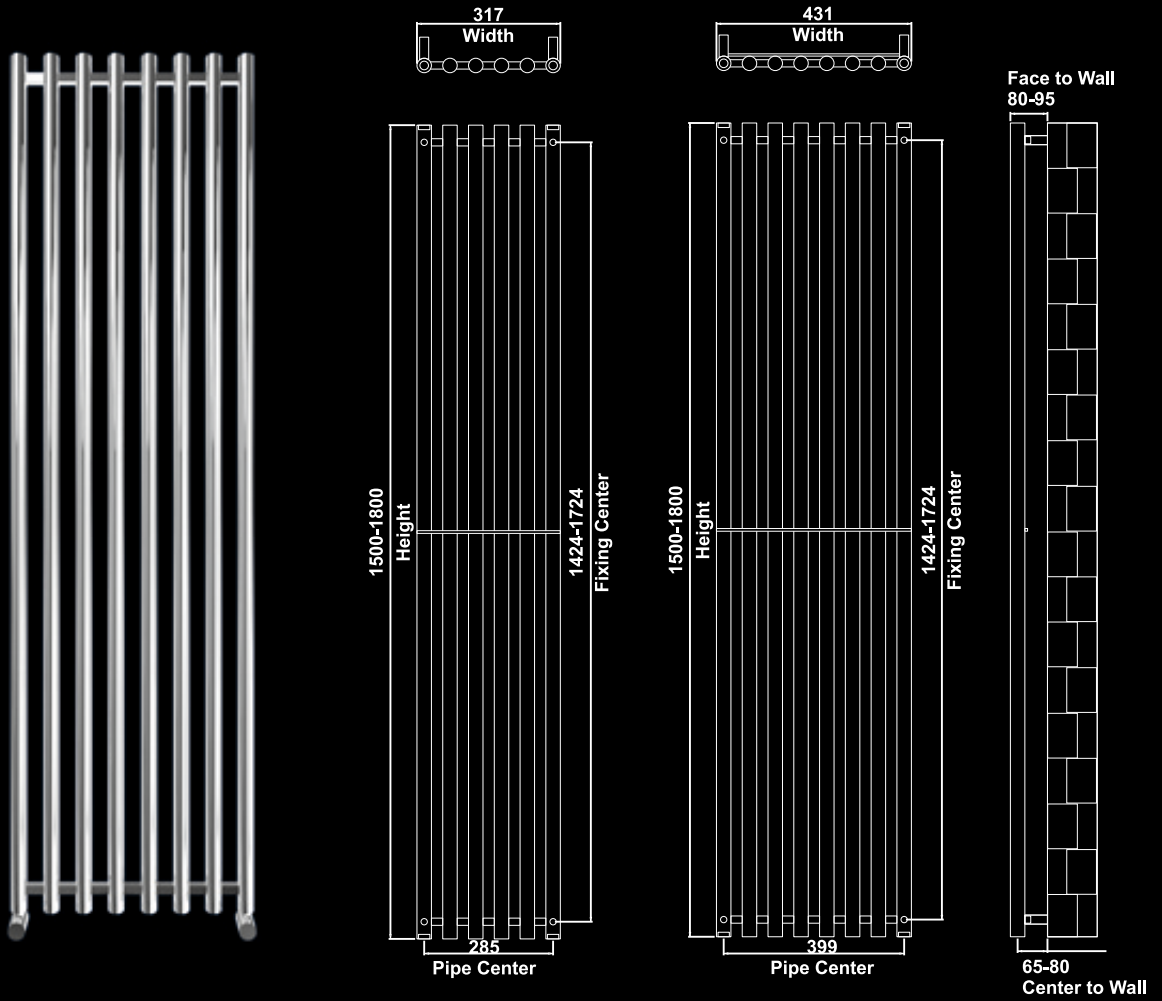

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Blancas	Vertical	1500	317	72	285	65-80	80-95	1424	Ø32x1	6	E/C/D	2684	787
		1800	317	72	285	65-80	80-95	1724	Ø32x1	6	E/C/D	3222	945
	Horizontal	1500	431	72	399	65-80	80-95	1424	Ø32x1	8	E/C/D	3581	1050
		1800	431	72	399	65-80	80-95	1724	Ø32x1	8	E/C/D	4297	1260

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)

brava


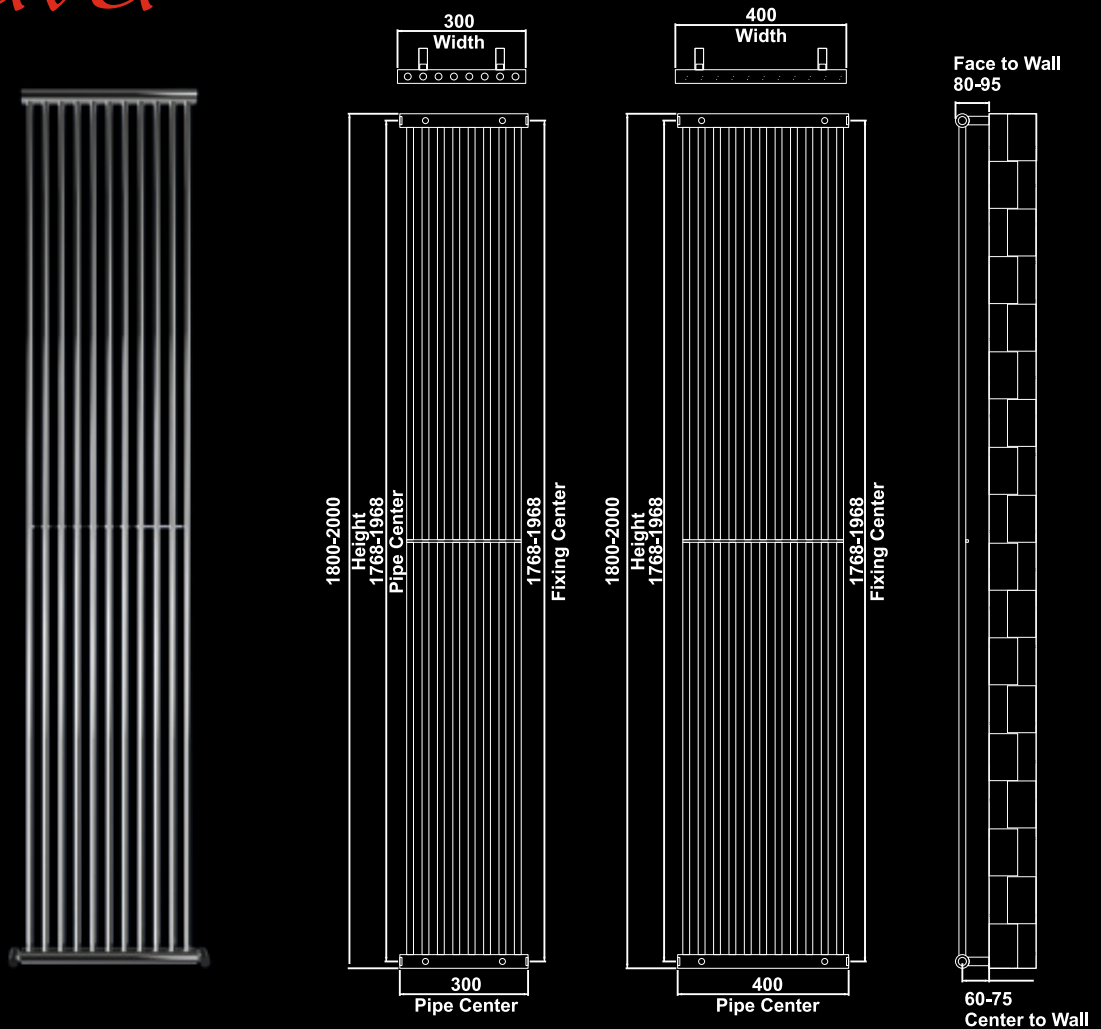


Please note the pipe centres on this model, do not allow for valves

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Brava	Vertical & Horizontal	1800	300	72	300	60-75	80-95	1768	Ø19x1 - Ø32x1	8-2	E/C/D	2592	760
		2000	300	72	300	60-75	80-95	1968	Ø19x1 - Ø32x1	8-2	E/C/D	2728	800
		1800	400	72	400	60-75	80-95	1768	Ø19x1 - Ø32x1	11-2	E/C/D	3563	1045
		2000	400	72	400	60-75	80-95	1968	Ø19x1 - Ø32x1	11-2	E/C/D	3751	1100

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



doha

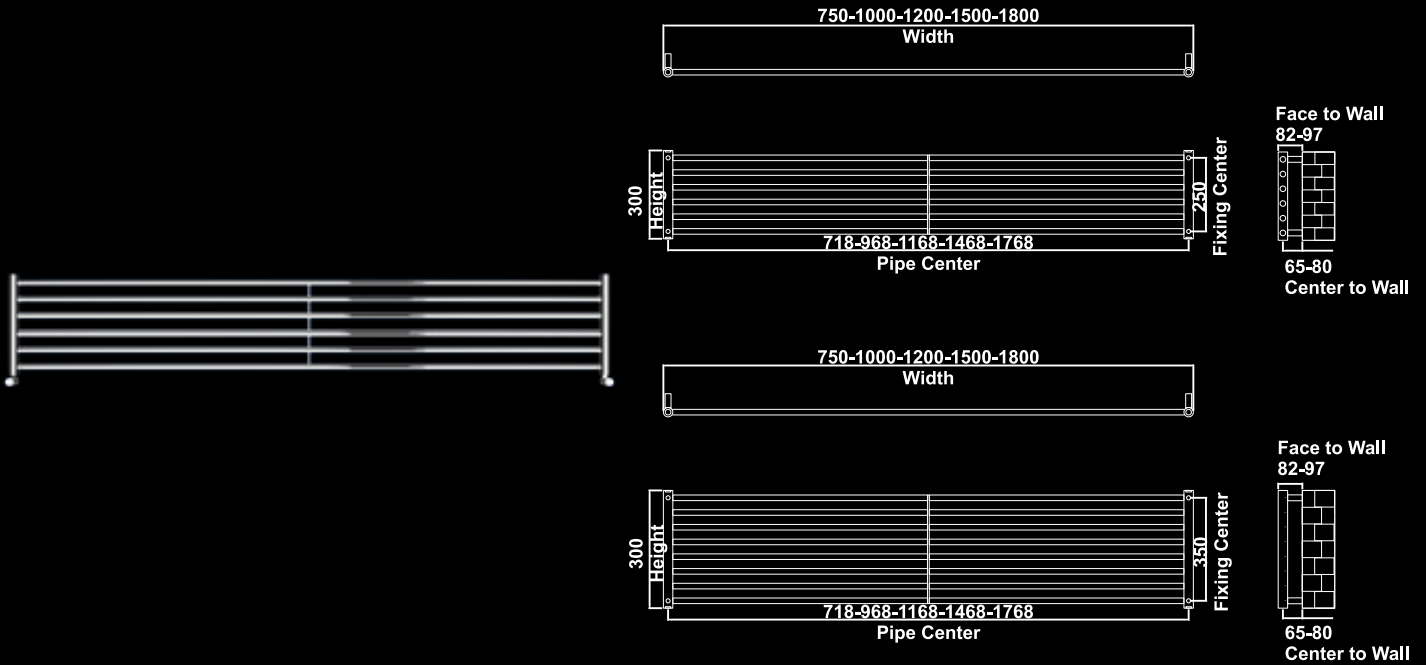

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Doha	Vertical & Horizontal	300	750	72	718	65-80	82-97	250	Ø19x1 - Ø32x1	6-2	E/C/D	808	237
		300	1000	72	968	65-80	82-97	250	Ø19x1 - Ø32x1	6-2	E/C/D	1078	316
		300	1200	72	1168	65-80	82-97	250	Ø19x1 - Ø32x1	6-2	E/C/D	1296	380
		300	1500	72	1468	65-80	82-97	250	Ø19x1 - Ø32x1	6-2	E/C/D	1620	475
		300	1800	72	1768	65-80	82-97	250	Ø19x1 - Ø32x1	6-2	E/C/D	1944	570
		400	750	72	718	65-80	82-97	350	Ø19x1 - Ø32x1	8-2	E/C/D	1078	316
		400	1000	72	968	65-80	82-97	350	Ø19x1 - Ø32x1	8-2	E/C/D	1439	422
		400	1200	72	1168	65-80	82-97	350	Ø19x1 - Ø32x1	8-2	E/C/D	1725	506
		400	1500	72	1468	65-80	82-97	350	Ø19x1 - Ø32x1	8-2	E/C/D	2159	633
		400	1800	72	1768	65-80	82-97	350	Ø19x1 - Ø32x1	8-2	E/C/D	2592	760

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)






java

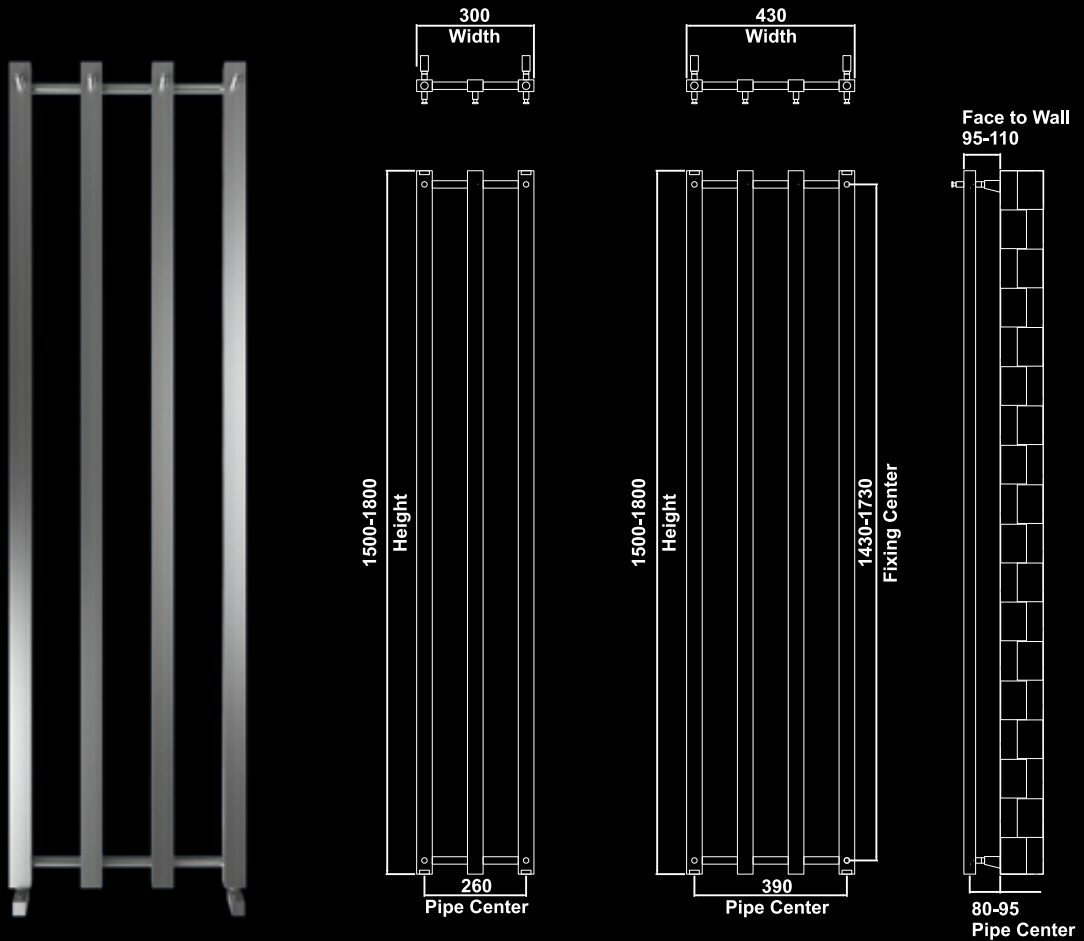


MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Java	Vertical	1500	300	45	260	80-95	95-110	1430	□ 40-30 □ 19x1	3	E/C/D	818	240
		1800	300	45	260	80-95	95-110	1730	□ 40-30 □ 19x1	3	E/C/D	924	271
		1500	430	45	390	80-95	95-110	1430	□ 40-30 □ 19x1	4	E/C/D	1095	321
		1800	430	45	390	80-95	95110	1730	□ 40-30 □ 19x1	4	E/C/D	1207	354

E:Electric C:Central D:Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)

Lanin

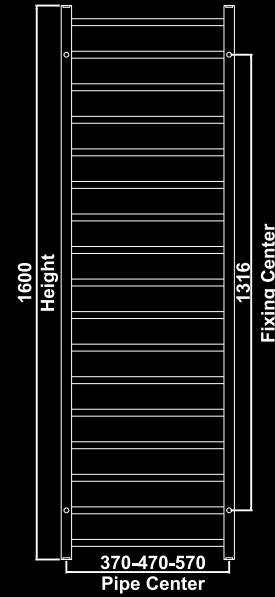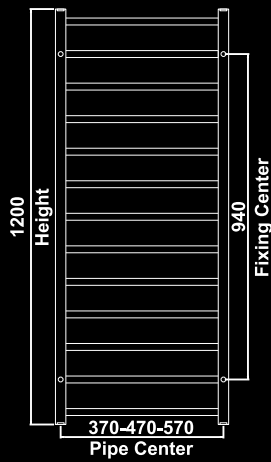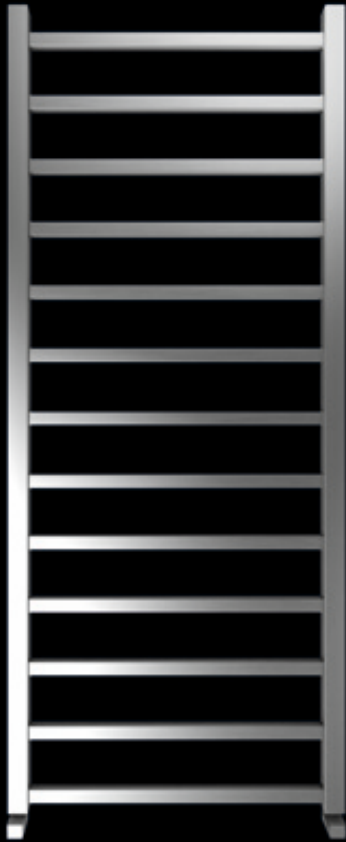


80-95 Center to Wall



MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Lanin	Vertical	800	400	45	370	80-95	95-110	564	□ 20-20 □ 30-30	9-2	E/C/D	760	223
		1200	400	45	370	80-95	95-110	940	□ 20-20 □ 30-30	13-2	E/C/D	1088	319
		1600	400	45	370	80-95	95-110	1316	□ 20-20 □ 30-30	17-2	E/C/D	1521	446
		800	500	45	470	80-95	95-110	654	□ 20-20 □ 30-30	9-2	E/C/D	829	243
		1200	500	45	470	80-95	95-110	940	□ 20-20 □ 30-30	13-2	E/C/D	1197	351
		1600	500	45	470	80-95	95-110	1316	□ 20-20 □ 30-30	17-2	E/C/D	1674	491
		800	600	45	570	80-95	95-110	564	□ 20-20 □ 30-30	9-2	E/C/D	904	265
		1200	600	45	570	80-95	95-110	940	□ 20-20 □ 30-30	13-2	E/C/D	1316	386
		1600	600	45	570	80-95	95-110	1316	□ 20-20 □ 30-30	17-2	E/C/D	1841	540

E:Electric C:Central D:Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



lima

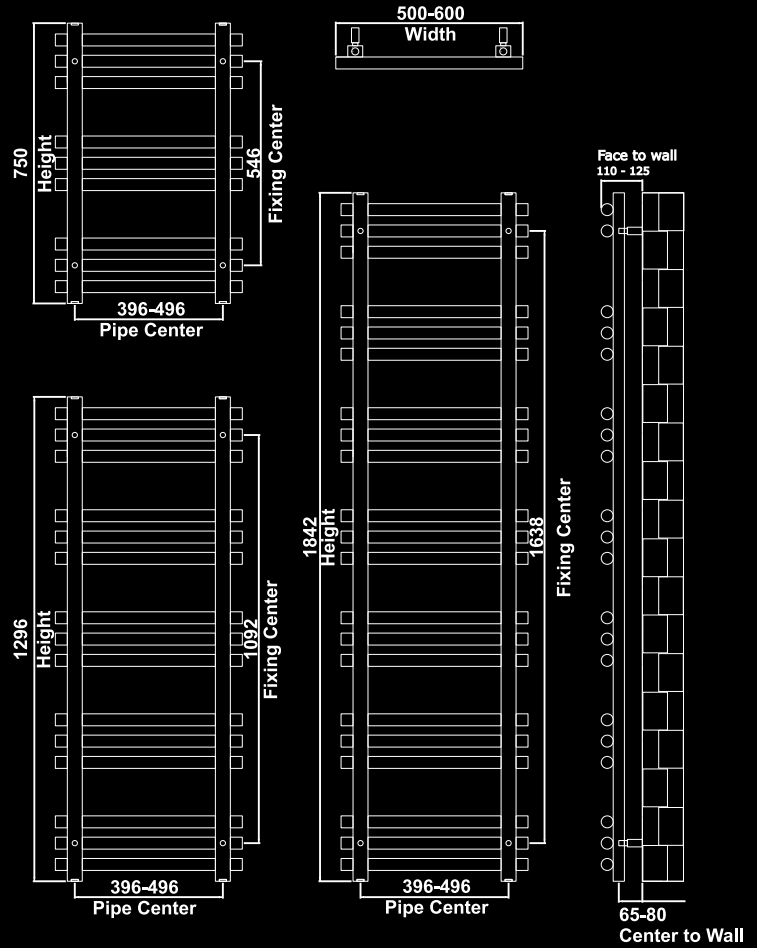

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Lima	Vertical	750	500	62	396	65-80	110-125	546	Ø32x1 □ 40x30	9-2	E/C/D	1783	523
		1296	500	62	396	65-80	110-125	1092	Ø32x1 □ 40x30	12-2	E/C/D	2377	697
		1842	500	62	396	65-80	110-125	1638	Ø32x1 □ 40x30	15-2	E/C/D	3001	880
		750	600	62	496	65-80	110-125	546	Ø32x1 □ 40x30	9-2	E/C/D	2049	601
		1296	600	62	496	65-80	110-125	1092	Ø32x1 □ 40x30	12-2	E/C/D	2735	802
		1842	600	62	496	65-80	110-125	1638	Ø32x1 □ 40x30	15-2	E/C/D	3448	1011

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



moti

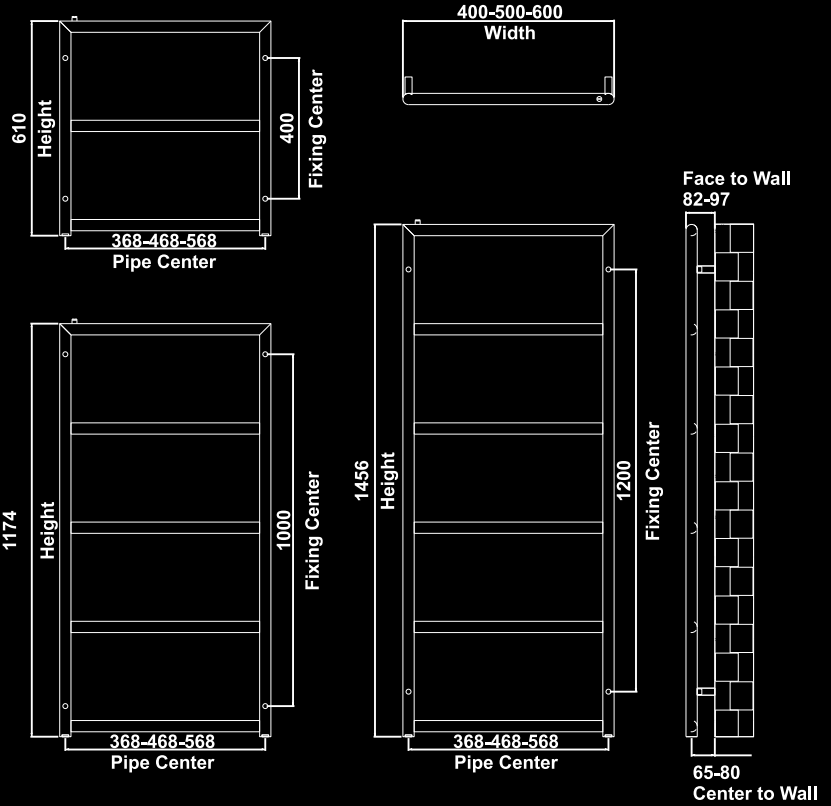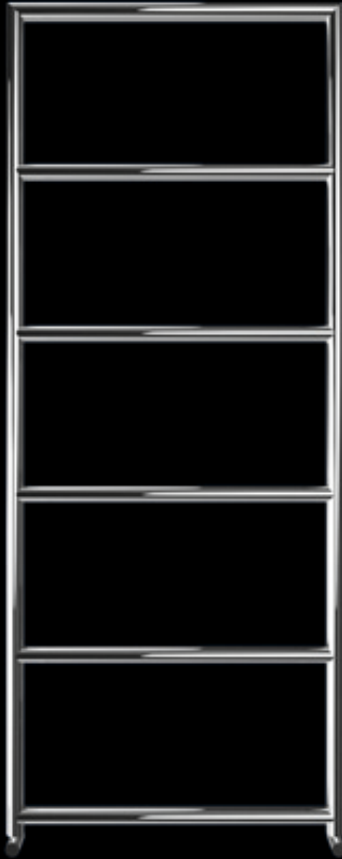

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Moti	Vertical	610	400	72	368	65-80	82-97	400	Ø32x1	3-2	E/C/D	1061	311
		1174	400	72	368	65-80	82-97	1000	Ø32x1	5-2	E/C/D	1054	309
		1456	400	72	368	65-80	82-97	1200	Ø32x1	6-2	E/C/D	1221	358
		610	500	72	468	65-80	82-97	400	Ø32x1	3-2	E/C/D	808	237
		1174	500	72	468	65-80	82-97	1000	Ø32x1	5-2	E/C/D	1142	335
		1456	500	72	468	65-80	82-97	1200	Ø32x1	6-2	E/C/D	1309	384
		610	600	72	568	65-80	82-97	400	Ø32x1	3-2	E/C/D	897	263
		1174	600	72	568	65-80	82-97	1000	Ø32x1	5-2	E/C/D	1231	361
		1456	600	72	568	65-80	82-97	1200	Ø32x1	6-2	E/C/D	1398	410

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)




nanda

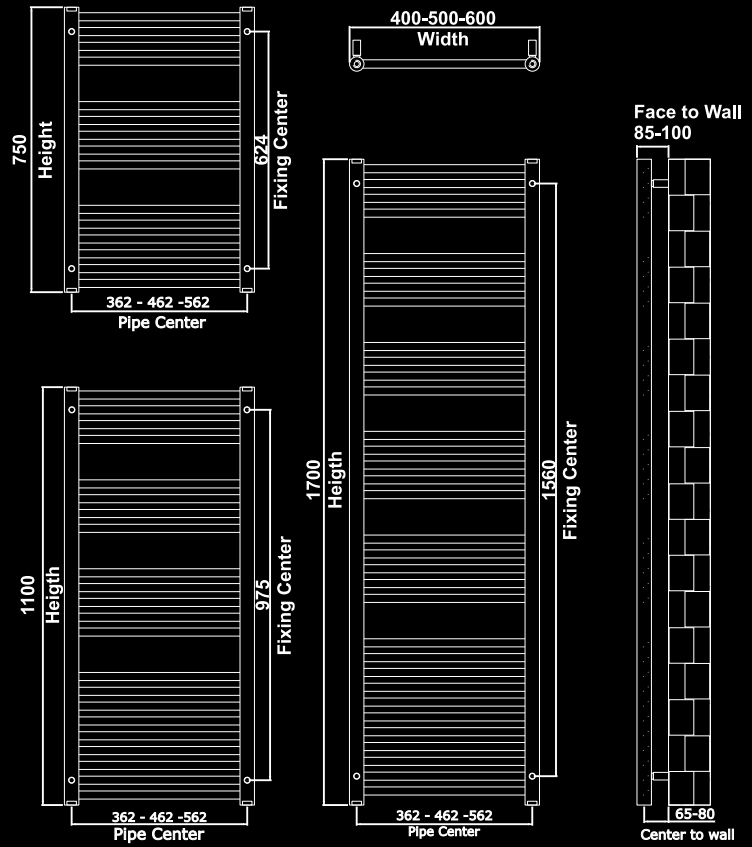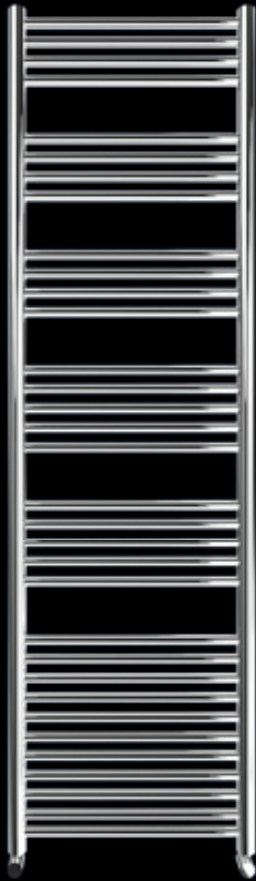

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Nanda	Vertical	750	400	78	362	65-80	85-100	624	Ø21,3x1 - Ø38x1,2	15-2	E/C/D	1302	383
		1100	400	78	362	65-80	85-100	975	Ø21,3x1 - Ø38x1,2	22-2	E/C/D	1210	682
		1700	400	78	362	65-80	85-100	1560	Ø21,3x1 - Ø38x1,2	33-2	E/C/D	2883	484
		750	500	78	462	65-80	85-100	624	Ø21,3x1 - Ø38x1,2	15-2	E/C/D	1432	421
		1100	500	78	462	65-80	85-100	975	Ø21,3x1 - Ø38x1,2	22-2	E/C/D	1331	750
		1700	500	78	462	65-80	85-100	1560	Ø21,3x1 - Ø38x1,2	33-2	E/C/D	3171	933
		750	600	78	562	65-80	85-100	624	Ø21,3x1 - Ø38x1,2	15-2	E/C/D	1575	463
		1100	600	78	562	65-80	85-100	975	Ø21,3x1 - Ø38x1,2	22-2	E/C/D	1464	825
		1700	600	78	562	65-80	85-100	1560	Ø21,3x1 - Ø38x1,2	33-2	E/C/D	3488	1026

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)






nila

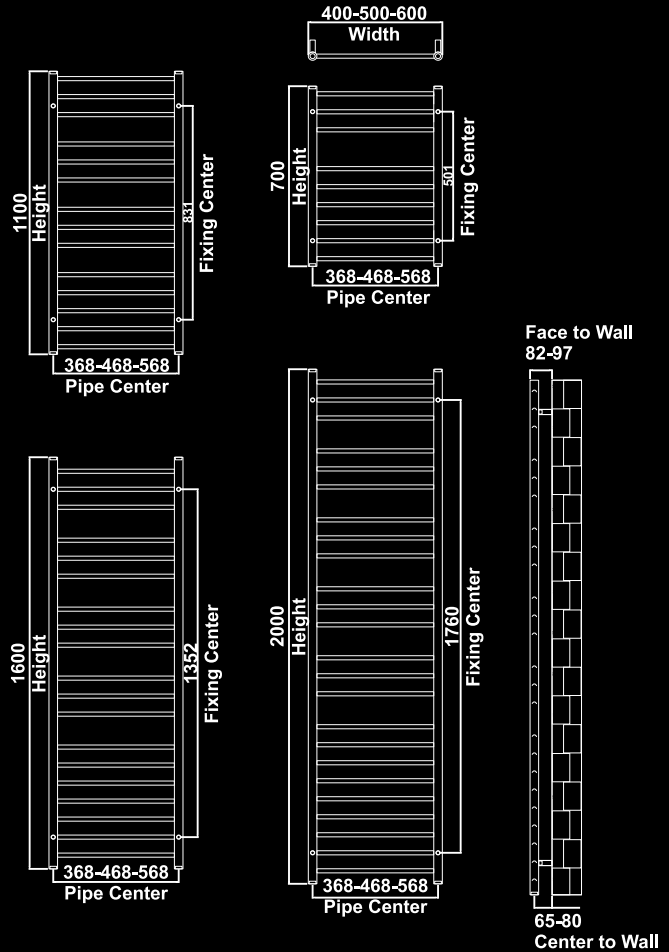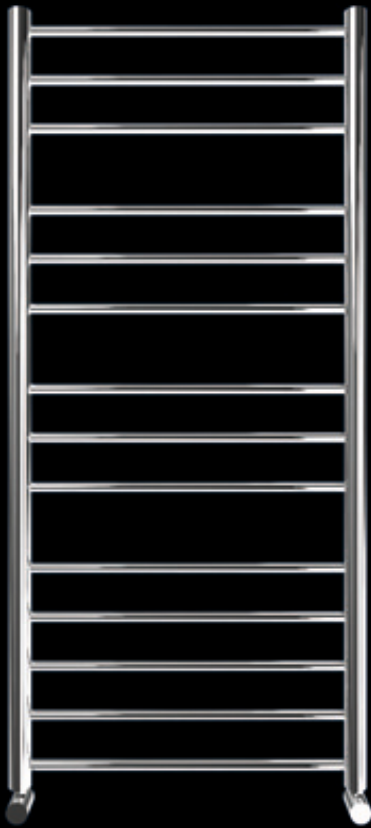

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Nila	Vertical	700	400	72	368	65-80	82-97	501	Ø16x1 - Ø32x1	9-2	E/C/D	1139	334
		1100	400	72	368	65-80	82-97	831	Ø16x1 - Ø32x1	14-2	E/C/D	1671	490
		1600	400	72	368	65-80	82-97	1352	Ø16x1 - Ø32x1	19-2	E/C/D	2356	691
		2000	400	72	368	65-80	82-97	1760	Ø16x1 - Ø32x1	24-2	E/C/D	2496	732
		700	500	72	468	65-80	82-97	501	Ø16x1 - Ø32x1	9-2	E/C/D	1251	367
		1100	500	72	468	65-80	82-97	831	Ø16x1 - Ø32x1	14-2	E/C/D	1838	539
		1600	500	72	468	65-80	82-97	1352	Ø16x1 - Ø32x1	19-2	E/C/D	2592	760
		2000	500	72	468	65-80	82-97	1760	Ø16x1 - Ø32x1	24-2	E/C/D	2745	805
		700	600	72	568	65-80	82-97	501	Ø16x1 - Ø32x1	9-2	E/C/D	1374	403
		1100	600	72	568	65-80	82-97	831	Ø16x1 - Ø32x1	14-2	E/C/D	2019	592
		1600	600	72	568	65-80	82-97	1352	Ø16x1 - Ø32x1	19-2	E/C/D	2851	836
		2000	600	72	568	65-80	82-97	1760	Ø16x1 - Ø32x1	24-2	E/C/D	3018	885

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)

noha

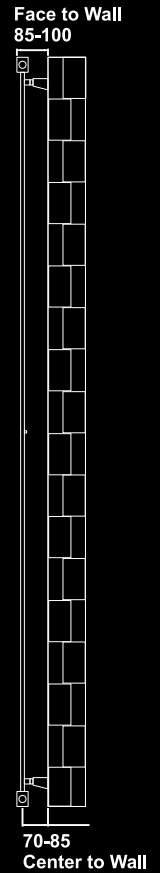
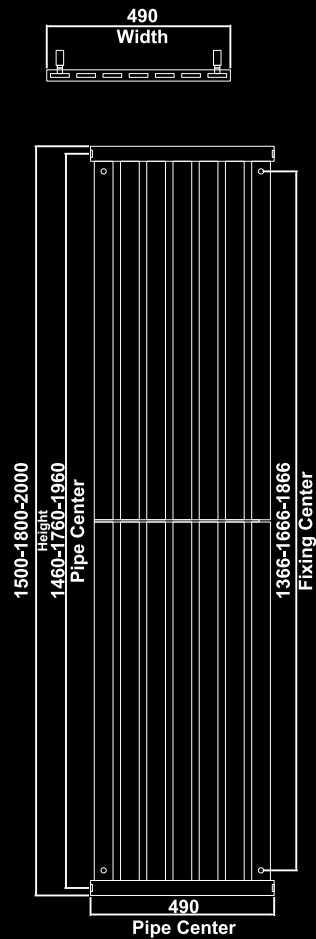
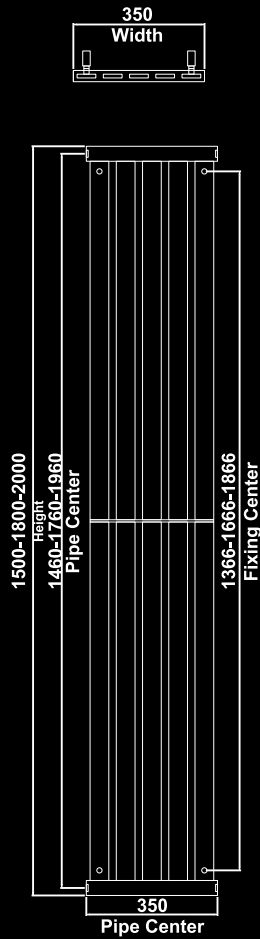
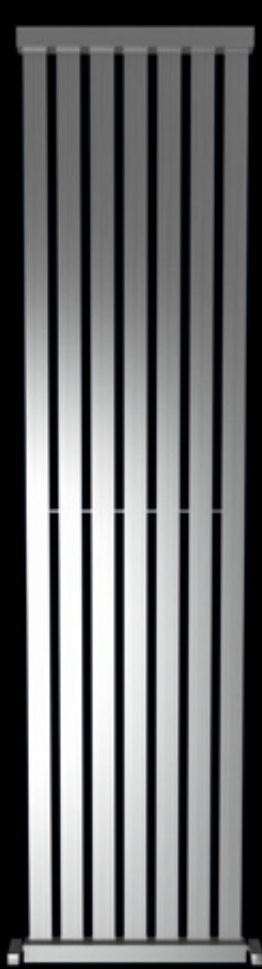


Please note the pipe centres on this model, do not allow for valves

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Noha	Vertical & Horizontal	1500	350	35	350	70-85	85-100	1366	□ 50-10 □ 40-30	5-2	E/C/D	2148	630
		1800	350	35	350	70-85	85-100	1666	□ 50-10 □ 40-30	5-2	E/C/D	2575	755
		2000	350	35	350	70-85	85-100	1866	□ 50-10 □ 40-30	5-2	E/C/D	2847	835
		1500	490	35	490	70-85	85-100	1366	□ 50-10 □ 40-30	7-2	E/C/D	3008	882
		1800	490	35	490	70-85	85-100	1666	□ 50-10 □ 40-30	7-2	E/C/D	3604	1057
		2000	490	35	490	70-85	85-100	1866	□ 50-10 □ 40-30	7-2	E/C/D	3986	1169

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



nora

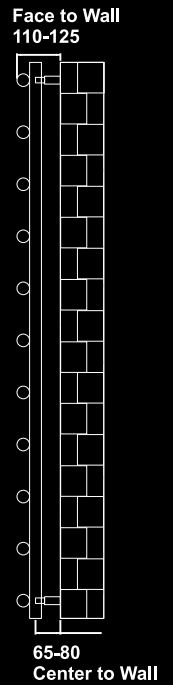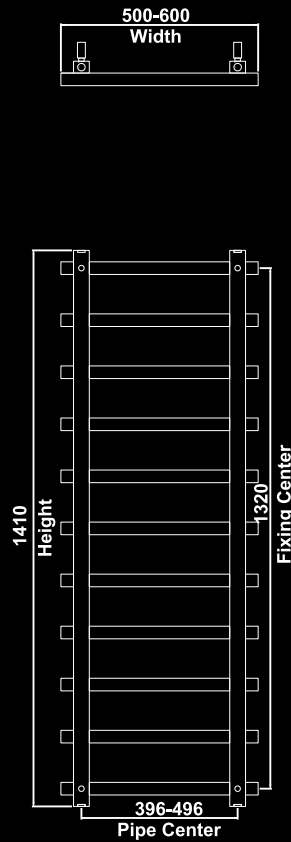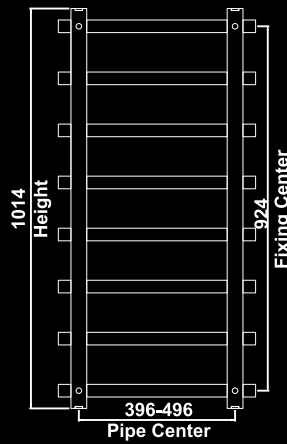

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Nora	Vertical	750	500	62	396	65-80	110-125	660	Ø32x1 □ 40x30	6-2	E/C/D	1337	392
		1014	500	62	396	65-80	110-125	924	Ø32x1 □ 40x30	8-2	E/C/D	1783	523
		1410	500	62	396	65-80	110-125	1320	Ø32x1 □ 40x30	11-2	E/C/D	2472	725
		750	600	62	496	65-80	110-125	660	Ø32x1 □ 40x30	6-2	E/C/D	1514	444
		1014	600	62	496	65-80	110-125	924	Ø32x1 □ 40x30	8-2	E/C/D	2022	593
		1410	600	62	496	65-80	110-125	1320	Ø32x1 □ 40x30	11-2	E/C/D	2622	769

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)





oni

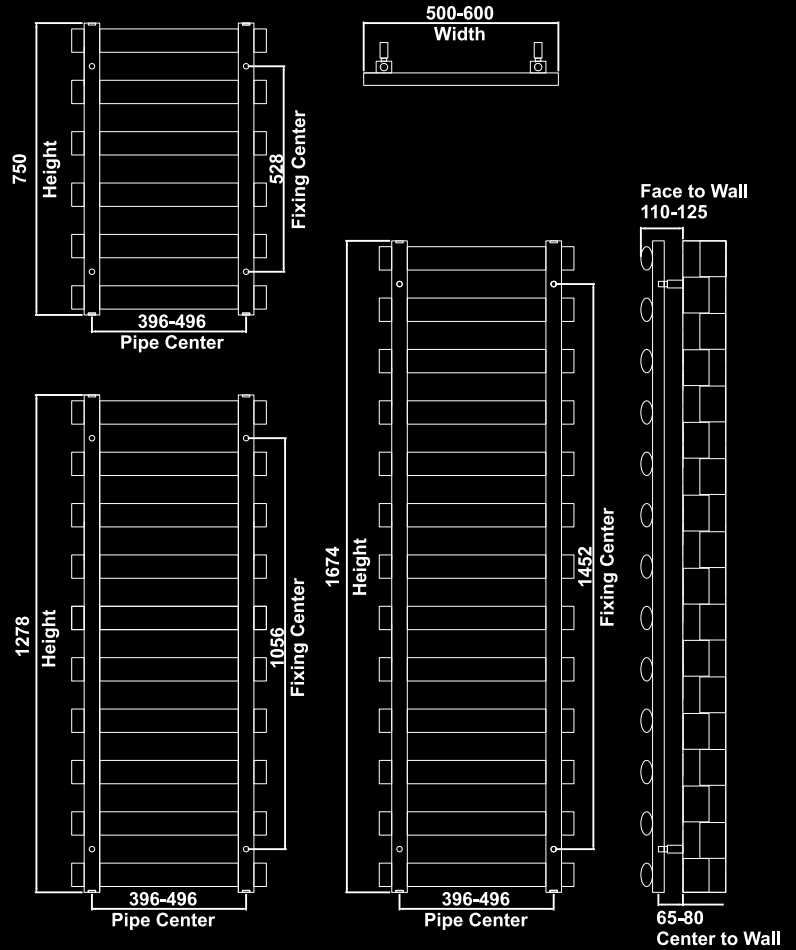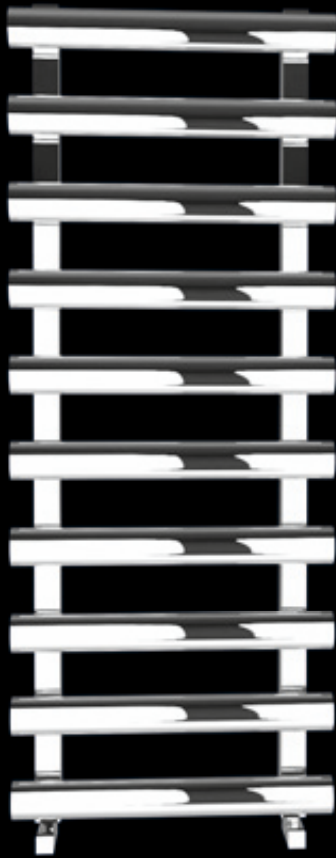

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Oni	Vertical	750	500	60	396	30-45	75-90	528	o 60x30 □ 40x30	6-2	E/C/D	1535	450
		1278	500	60	396	30-45	75-90	1056	o 60x30 □ 40x30	9-2	E/C/D	2217	650
		1674	500	60	396	30-45	75-90	1452	o 60x30 □ 40x30	11-2	E/C/D	2731	801
		750	600	60	496	30-45	75-90	528	o 60x30 □ 40x30	6-2	E/C/D	1739	510
		1278	600	60	496	30-45	75-90	1056	o 60x30 □ 40x30	9-2	E/C/D	2523	740
		1674	600	60	496	30-45	75-90	1452	o 60x30 □ 40x30	11-2	E/C/D	3212	942

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



rimo

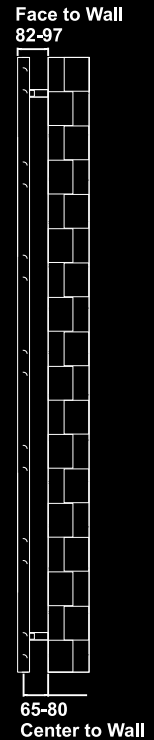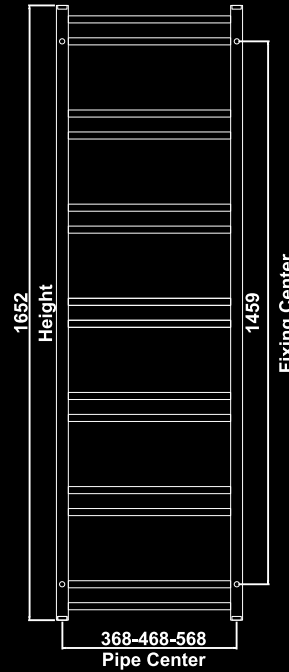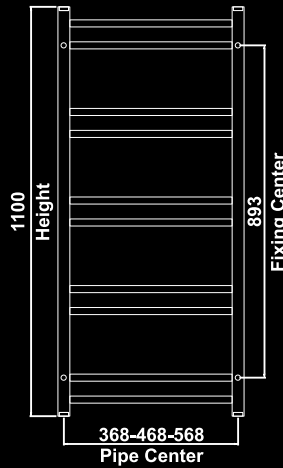

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Rimo	Vertical	700	400	72	368	65-80	82-97	506	Ø19x1 - Ø32x1	6-2	E/C/D	757	222
		1100	400	72	368	65-80	82-97	893	Ø19x1 - Ø32x1	10-2	E/C/D	1251	367
		1652	400	72	368	65-80	82-97	1459	Ø19x1 - Ø32x1	16-2	E/C/D	1773	520
		700	500	72	468	65-80	82-97	506	Ø19x1 - Ø32x1	6-2	E/C/D	825	242
		1100	500	72	468	65-80	82-97	893	Ø19x1 - Ø32x1	10-2	E/C/D	1361	399
		1652	500	72	468	65-80	82-97	1459	Ø19x1 - Ø32x1	16-2	E/C/D	1933	567
		700	600	72	568	65-80	82-97	506	Ø19x1 - Ø32x1	6-2	E/C/D	910	267
		1100	600	72	568	65-80	82-97	893	Ø19x1 - Ø32x1	10-2	E/C/D	1470	431
		1652	600	72	568	65-80	82-97	1459	Ø19x1 - Ø32x1	16-2	E/C/D	2124	623

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)


rondo

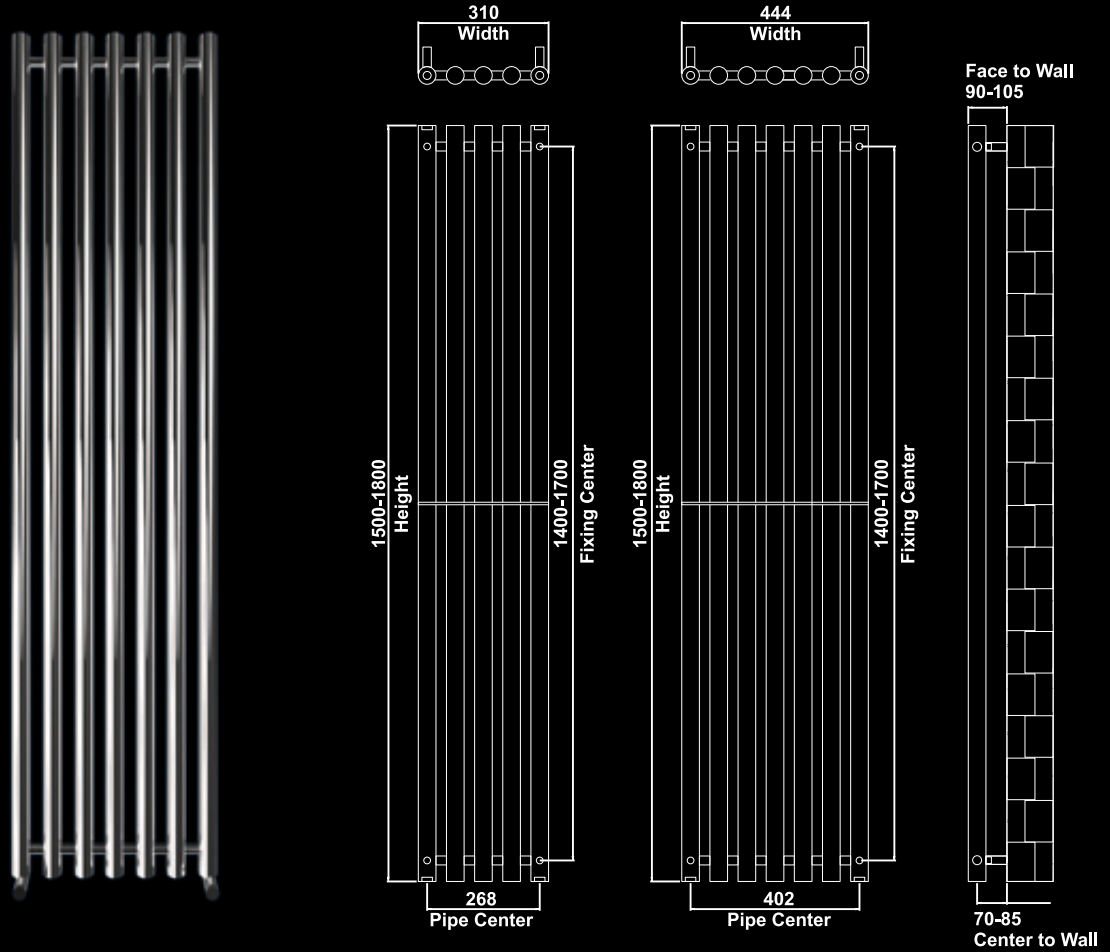

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Rondo	Vertical & Horizontal	1500	310	82	268	70-85	90-105	1400	Ø42x1,2	5	E/C/D	2899	850
		1800	310	82	268	70-85	90-105	1700	Ø42x1,2	5	E/C/D	3478	1020
		1500	444	82	402	70-85	90-105	1400	Ø42x1,2	7	E/C/D	4058	1190
		1800	444	82	402	70-85	90-105	1700	Ø42x1,2	7	E/C/D	4869	1428

E:Electric C:Central D:Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)






soho

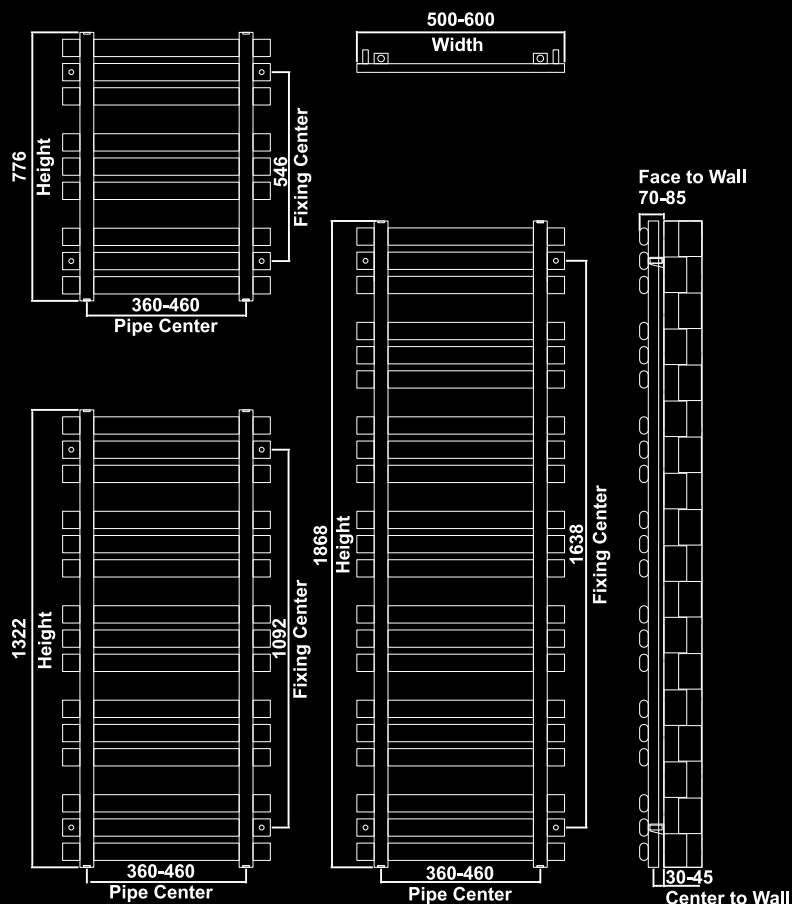


MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Soho	Vertical	776	500	55	360	30-45	70-85	546	o 50x25 □ 40x30	9-2	E/C/D	2049	601
		1049	500	55	360	30-45	70-85	1092	o 50x25 □ 40x30	12-2	E/C/D	2745	805
		1322	500	55	360	30-45	70-85	1638	o 50x25 □ 40x30	15-2	E/C/D	3458	1014
		776	600	55	460	30-45	70-85	546	o 50x25 □ 40x30	9-2	E/C/D	2363	693
		1049	600	55	460	30-45	70-85	1092	o 50x25 □ 40x30	12-2	E/C/D	3168	929
		1322	600	55	460	30-45	70-85	1638	o 50x25 □ 40x30	15-2	E/C/D	3969	1164

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)


vega

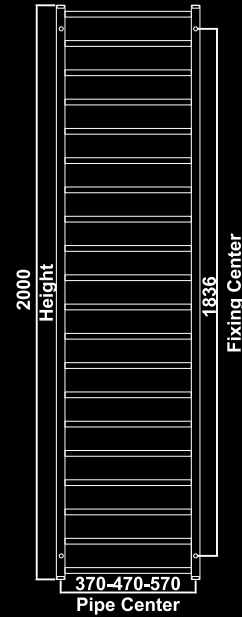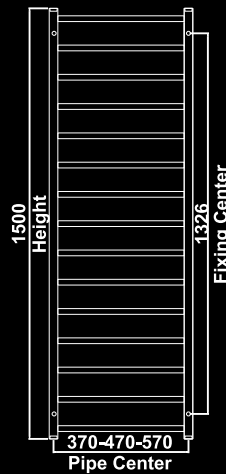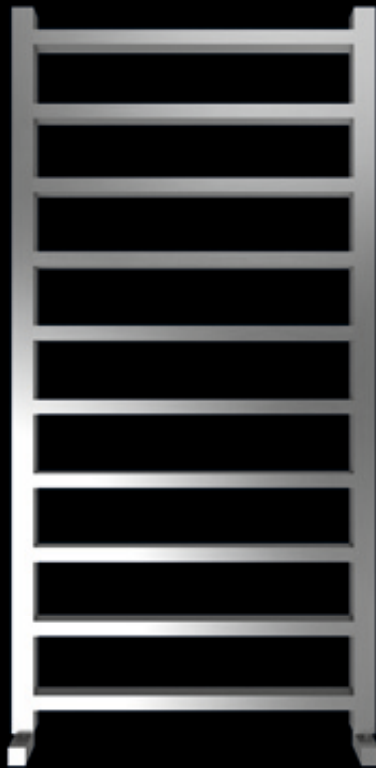

Face to Wall
95-110





Center to Wall



MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Vega	Vertical	500	400	45	370	80-95	95-110	306	□ 20-20 □ 30-30	5-2	E/C/D	426	125
		1000	400	45	370	80-95	95-110	816	□ 20-20 □ 30-30	10-2	E/C/D	833	244
		1500	400	45	370	80-95	95-110	1326	□ 20-20 □ 30-30	15-2	E/C/D	1623	476
		2000	400	45	370	80-95	95-110	1836	□ 20-20 □ 30-30	20-2	E/C/D	3163	928
		500	500	45	470	80-95	95-110	306	□ 20-20 □ 30-30	5-2	E/C/D	475	139
		1000	500	45	470	80-95	95-110	816	□ 20-20 □ 30-30	10-2	E/C/D	915	268
		1500	500	45	470	80-95	95-110	1326	□ 20-20 □ 30-30	15-2	E/C/D	1785	523
		2000	500	45	470	80-95	95-110	1836	□ 20-20 □ 30-30	20-2	E/C/D	3478	1020
		500	600	45	570	80-95	95-110	306	□ 20-20 □ 30-30	5-2	E/C/D	520	153
		1000	600	45	570	80-95	95-110	816	□ 20-20 □ 30-30	10-2	E/C/D	1006	295
		1500	600	45	570	80-95	95-110	1326	□ 20-20 □ 30-30	15-2	E/C/D	1961	575
		2000	600	45	570	80-95	95-110	1836	□ 20-20 □ 30-30	20-2	E/C/D	3825	1122

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)

Vera






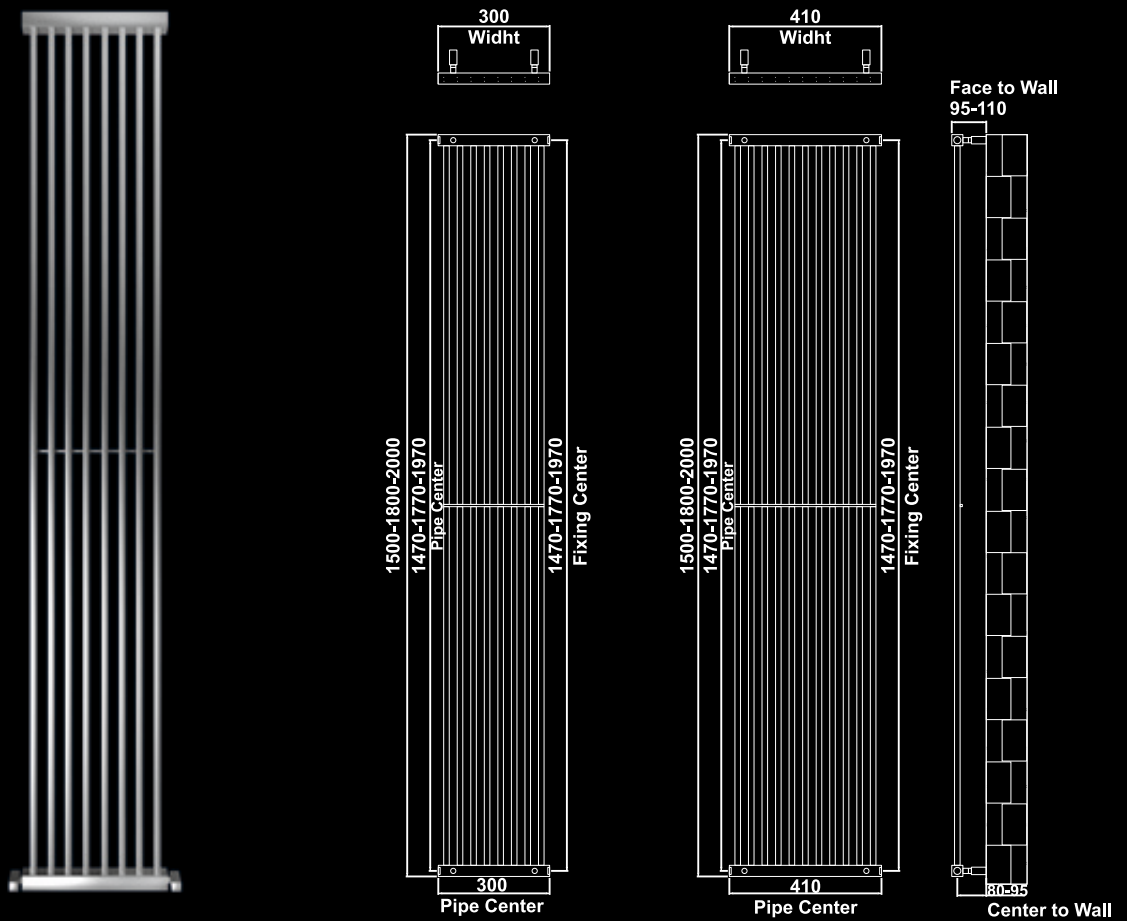


Please note the pipe centres on this model, do not allow for valves

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Vera	Vertical & Horizontal	1500	300	45	300	80-95	95-110	1470	□ 15-15 □ 30-30	8-2	E/C/D	2476	726
		1800	300	45	300	80-95	95-110	1770	□ 15-15 □ 30-30	8-2	E/C/D	2592	760
		2000	300	45	300	80-95	95-110	1970	□ 15-15 □ 30-30	8-2	E/C/D	2728	800
		1500	410	45	410	80-95	95-110	1470	□ 15-15 □ 30-30	11-2	E/C/D	2759	809
		1800	410	45	410	80-95	95-110	1770	□ 15-15 □ 30-30	11-2	E/C/D	3563	1045
		2000	410	45	410	80-95	95-110	1970	□ 15-15 □ 30-30	11-2	E/C/D	3751	1100

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)







Zao

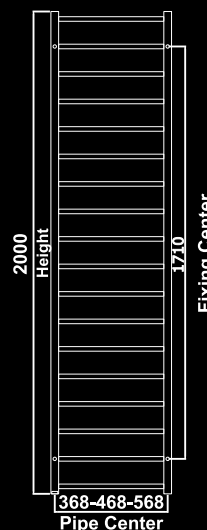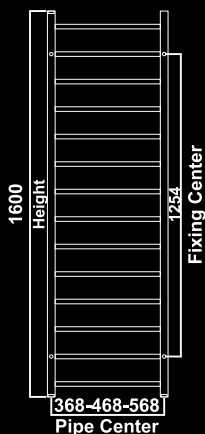

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu	Watts
Zao	Vertical	700	400	72	368	65-80	82-97	455	Ø19x1 - Ø32x1	8-2	E/C/D	948	278
		1100	400	72	368	65-80	82-97	831	Ø19x1 - Ø32x1	11-2	E/C/D	1357	398
		1600	400	72	368	65-80	82-97	1254	Ø19x1 - Ø32x1	14-2	E/C/D	1773	520
		2000	400	72	368	65-80	82-97	1710	Ø19x1 - Ø32x1	18-2	E/C/D	2465	723
		700	500	72	468	65-80	82-97	455	Ø19x1 - Ø32x1	8-2	E/C/D	1033	303
		1100	500	72	468	65-80	82-97	831	Ø19x1 - Ø32x1	11-2	E/C/D	1477	433
		1600	500	72	468	65-80	82-97	1254	Ø19x1 - Ø32x1	14-2	E/C/D	1933	567
		2000	500	72	468	65-80	82-97	1710	Ø19x1 - Ø32x1	18-2	E/C/D	2687	788
		700	600	72	568	65-80	82-97	455	Ø19x1 - Ø32x1	8-2	E/C/D	1139	334
		1100	600	72	568	65-80	82-97	831	Ø19x1 - Ø32x1	11-2	E/C/D	1623	476
		1600	600	72	568	65-80	82-97	1254	Ø19x1 - Ø32x1	14-2	E/C/D	2124	623
		2000	600	72	568	65-80	82-97	1710	Ø19x1 - Ø32x1	18-2	E/C/D	2953	866

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)

zena

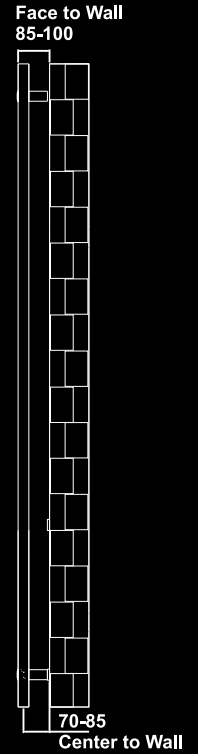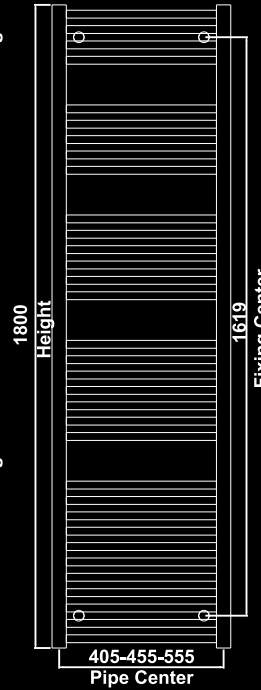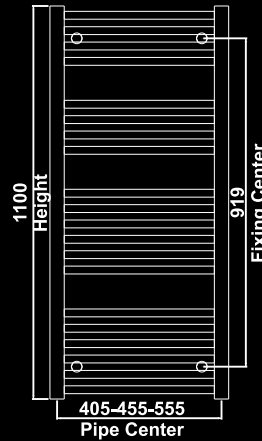

MODEL NAME	Installation Type	Overall Dimension			Pipe Centres mm	Pipe Centre to wall	Face to wall	Fixing Centres mm	Tubes Sizes mm	Tubes Qty. units	Fuel E/C/D	Heat Outputs Delta T : 50C		Heat Outputs Delta T : 50C	
		Height mm	Width mm	Depth mm								Btu Coloured	Watts	Btu	Watts
Zena	Vertical & Horizontal	700	450	30	405	70-85	85-100	518	Ø22x1.2	12	E/C/D	700	194	1004	294
		1100	450	30	405	70-85	85-100	919	Ø22x1.2	20	E/C/D	1069	313	1625	477
		1800	450	30	405	70-85	85-100	1619	Ø22x1.2	33	E/C/D	1756	515	2670	783
		700	500	30	455	70-85	85-100	518	Ø22x1.2	12	E/C/D	704	207	1071	314
		1100	500	30	455	70-85	85-100	919	Ø22x1.2	20	E/C/D	1142	335	1737	509
		1800	500	30	455	70-85	85-100	1619	Ø22x1.2	33	E/C/D	1846	541	2808	824
		700	600	30	555	70-85	85-100	518	Ø22x1.2	12	E/C/D	793	232	1206	354
		1100	600	30	555	70-85	85-100	919	Ø22x1.2	20	E/C/D	1289	378	1961	575
		1800	600	30	555	70-85	85-100	1619	Ø22x1.2	33	E/C/D	2120	622	3225	946

E:Electric C:Central D: Dual Fuel 10 Years Guarantee (Tested in accordance with current en 442 requirements)



aden



andes



balbi



blancas



brava



doha



java



lanin



lima




moti




nanda



nila



noha




nora



oni



rimo



rondo



soho



vega



vera



zao



zena



gia
heat



gia
heat

